

END USER MANUAL

Web link1: <https://evs.livoltek-portal.com/#/>
 For Europe, Middle East Regions, Africa
 Web link2: <https://www.livoltek-portal.com/#/>
 For Asia, Latin American, Australia and others

1. Download APP

Download "MY LIVOLTEK" app


The app is available on Google Play Store(Android) and App Store(Apple)



2.Registration APP

STEP 1

- 1)Choose "Login Settings"
- 2)Choose your "Server"
- 3)Click "login"
- 4)Choose "End-User"
- 5)Click "Register" and create your account

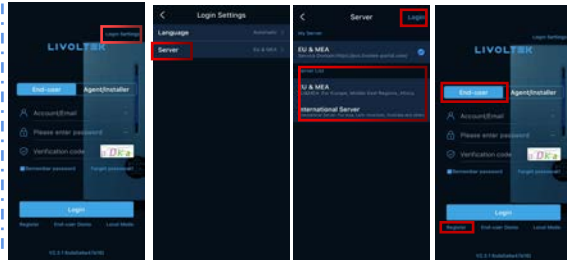


STEP 2

Complete the registration information

Tips:

- 1)If you do not receive the verification code within 2 minutes, in you inbox email, please check your junk email
- 2)Make sure you have selected the "I have read and agree".



STEP 3

Succeed



3.Create a site

STEP 1

Open 'My Livoltek' app
 Enter your account,password and verification code.Then click 'login'.



STEP 2

Click "Create A Site Now",If you are logging in for the first time



STEP 3

Enter your site information(If you have your own installer, you should choose the company name of the corresponding installer, if not, you can choose Livoltek.)



STEP 4

Choose your system type (Mandatory) and PV capacity (Mandatory) PV type(Optional) and PV Arrange (Optional)



STEP 5

Set time-of-use tariff of your site.


Tips:


Please fill in the tariff setting




4.Add your device


STEP 6

Add your device
 Click ,then click 'add'



STEP 7

Choose device model
 Click  to Scan SN number on your device




STEP 8

succeed



5. Usage details


In this screen you will find the following information about the site



Press Overview, you will find daily yield, current power, monthly revenue, total yield, total revenue and self-use ratio of all your sites.



In this screen you can find charger working status. Touch charger's icons charger page, you can check details of the charger.



6. Bluetooth mode


STEP 1

Click Local mode to test "BlueTooth"




STEP 2

Click the "BlueTooth Mode"




STEP 3

Find your Device 's SN number, and click it.



STEP 4

Successful and check inverter's information



For working mode, customer should choose one of them. We have Fast Mode, Dynamic Mode and Eco Mode for customer.



After click the "+" button, customer will go to this page, then you can set the Start-time and End-time, and the repeater, then click "+",it will show you a new schedule in the active schedule.



Click the Sessions and you will go to this page. It will show you the history record of the charger.



For Schedule, there are two parts, one is Active Schedule, the other is My History. Generally, we will active one schedule, or we need to add new one.



In the active schedule page, if we disactivate the schedule, then you can find the old schedule in My history.



After you set the mode and Schedule, then you can press START UP to start charging.

7. Wifi connect

- Step 1: Login in with your account.
- Step 2: Go the Me page and click the Local Mode.
- Step 3: Click Bluetooth Mode.
- Step 4: Choose the Bluetooth of your charger.
- Step 5: Use the password of bluetooth to pair with charger, and click the setting
- Step 6: Click the Network Configuration.
- Step 7: Input your Wi-Fi name and Password and click confirm button.

