

AIR BASIC 211 C11B T201

AIR/WATER HEAT PUMP INCL. VERTICAL SPLIT EVAPORATOR

ORDER NUMBER: 286600

SERIES: T200

TF MAX. 55 °C

SPLIT

APPLIANCE DATA

Dimensions of outdoor unit HxWxD	[mm]	865x1040x340
Dimensions of indoor unit HxWxD	[mm]	1908x680x871
Hydraulic connection	[inch]	1" union nut
Weight of outdoor unit	[kg]	66
Weight of indoor unit	[kg]	203 / 471
Casing colour		Tiger white 29/11289/grey RAL 7016

HEATING MODE PERFORMANCE FIGURES (to EN 14511)

Standard point A10/W35

Heating output range	[kW]	1.90 - 11.20
Total heating output/power consumption	[kW]	8.00 / 1.70
COP		4,70

Operating point A7/W35

Heating output range	[kW]	1.90 - 10.20
Total heating output/power consumption	[kW]	7.00 / 1.60
COP		4,40

Standard point A2/W35

Heating output range	[kW]	1.30 - 8.50
Total heating output/power consumption	[kW]	5.50 / 1.50
COP		3,70

Standard point L-7/W35

Heating output range	[kW]	1.20 - 6.80
Total heating output/power consumption	[kW]	4.20 / 1.40
COP		3,00

Operating point L-10/W35

Heating output range	[kW]	1.00 - 6.20
Total heating output/power consumption	[kW]	3.70 / 1.30
COP		2,90


Operating point A2/W50

Heating output range	[kW]	1.30 - 7.30
Total heating output/power consumption	[kW]	5.40 / 2.50
COP		2,20

COOLING MODE PERFORMANCE FIGURES

Operating point A35/W18

Cooling capacity range	[kW]	1.80 - 11.10
Nominal cooling capacity	[kW]	7,90
Total nominal power consumption	[kW]	2,60
Energy efficiency ratio EER at nominal output		3,00

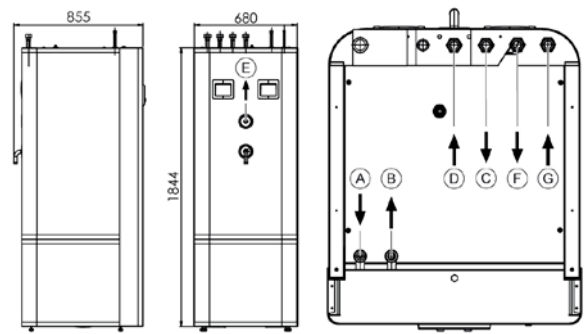

Indoor unit

- (A) Refrigerant line LL (liquid line)
- (B) Refrigerant line HG (hot gas line)
- (C) FL heating/cooling 1"
- (D) RTN heating/cooling 1"
- (E) DHW circulation 1/2"
- (F) DHW 1"
- (G) Cold water 1"

SPECIFICATION

Phases/nominal voltage/frequency	[~]/[V]/[Hz]	1/230/50
Outdoor unit, controller		
Phases/nominal voltage/frequency	[~]/[V]/[Hz]	3/400/50 or 1/230/50
Electric immersion heater		
Electric immersion heater internal	[kW]	8.8 (2.95/2.95/2.95)
Output factor cos φ		0,97
Fuse protection (tripping curve "C")	[A]	16
Max. operating current	[A]	12,20
Max. starting current, compressor	[A]	15.00 / 25.00*
Sound power/sound pressure level (at 1 m distance), indoor level	[dBA]**	- / -
Sound power/sound pressure level (at 10 m distance), outdoor unit	[dBA]	62.0 / 34.0

CONDENSER

Type		Plate heat exchanger
Material		Stainless steel 1.4301
Max. refrigerant operating pressure	[bar]	43
Max. heat transfer medium operating pressure	[bar]	3
Heat transfer medium temperature differential	[K]	5
Application range	[°C]	55
Heat transfer medium		Water
Test pressure	[bar]	59
Heat transfer medium flow rate	[m³/h]	1,43
Internal pressure differential	[mbar]	80
Flow meter FM standard	Internal	built-in
Circulation pump heat sink WNA	Internal	Yonos Para HPS15/7.5
Residual head I WNA external, incl. FM	[mbar]	430

REFRIGERANT CIRCUIT

Refrigerant		R410A
Defrost technology		Hot gas
Refrigerant charge	[kg]	2,15

COMPRESSOR

Type		Rotary piston
Output levels		Infinitely variable
Speed	[rpm]	900-5700
Voltage/frequency	[V]/[Hz]	230/50

FAN

Type		axial
Number	[pce]	1
Voltage/frequency	[V]/[Hz]	230/50
Power consumption	[W]	70


EVAPORATOR

Unit type		built-in
Type		Finned tube
Number	[pce]	1
Air flow rate	[m³/h]	4590
Application range min./max	[°C]	-20 / 35


¹⁾only possible with buffer tank

*Starting current, compressor with locked rotor

**Sound pressure level measured in a free field; sound power levels measured at max. nominal speed



Outdoor unit

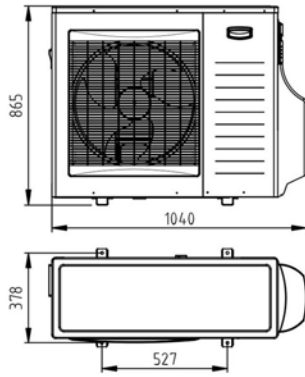

PRODUCT DATA **ErP: AIR BASIC 211 C11B T201**

	COLDER	MEAN	HOTTER
LOW TEMPERATURE	A++	35°C	
η_s	133	159	180
Energy consumption [kWh]	6997	3969	1602
P rated [kW]	10	8	6
SCOP	3,41	4,04	4,59
MEDIUM TEMPERATURE	A+	55°C	
η_s	97	110	138
Energy consumption [kWh]	7285	3941	1741
P rated [kW]	7	5	5
SCOP	2,50	2,82	3,53
DHW	B	T200	
η_{WH}	66	73	84
Energy consumption [kWh]	1263	1155	1002
Draw-off profile	L		
Tank losses [W]	79		
	indoor	outdoor	
Sound power level [dBA]	-	62	
Controller class with room remote control	VI	Controller contribution [%]	4,0
Controller class without room remote control	II	Controller contribution [%]	2,0



MULTI TOWER ALL IN ONE
Fully equipped


- DHW tank, 168 l
- Buffer tank 100 l, heating / cooling
- 3-way switching valve for DHW heating and/or defrosting
- Safety valve
- Electric auxiliary heater 8.8 kW
- Flow meter for safety monitoring and heat quantity measurement for heating / cooling / DHW heating
- Air vent valve
- High efficiency energy saving circulation pump
- Plate heat exchanger / condenser
- Drain and fill valve
- Pressure maintaining device (DEV), on site

	Max. connection length	Max. height differential
AIR BASIC 211 C11B T201	$L \leq 20$	$H_{max} \leq 15$

LIMITS OF USE AIR BASIC 211 C11B T201


Outdoor temperature/max. heat pump flow temperature	A-10/W55°C A-15/W55°C A-20/W50°C
Underfloor heating (-15°C / 35°C)	YES
Radiators (-15°C / 50°C)	YES
Radiators (-15°C / 60°C)	NO
Domestic hot water	YES

Observe minimum clearances



Minimum clearances	AIR BASIC 211 C11B T201
a	> 20 cm
b	> 10 cm
c	> 70 cm
d	> 1.50 m

With self-supporting mounting, noise levels will be higher!

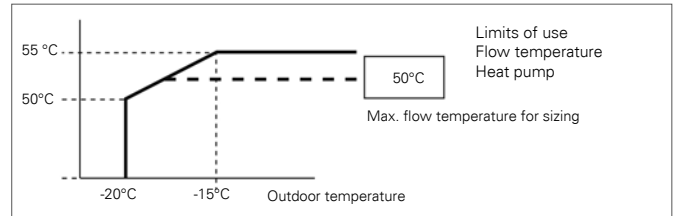

PERFORMANCE CURVES AIR BASIC 211 C11B T201

