



中国认可
国际互认
检测
TESTING
CNAS L6214



UN38.3 测试报告

UN38.3 Test Report

报告编号 Report No.: SA2007629U 01001

样品名称: 锂电池组
Sample Name: Lithium Battery Pack

样品型号: BluE-PACK5.1
Sample Model:

委托单位: 深圳科士达新能源有限公司
Applicant: Shenzhen Kstar New Energy Company Limited

签发日期: 2020-09-08
Issue Date:

东莞市安磁检测技术有限公司

Dongguan Ancic Electronic Technology Co., Ltd.



Dongguan Ancic Electronic Technology Co., Ltd.

Address: 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial, Development Zone, Dongguan City, Guangdong Pr. China

Tel: 0769-85075888 Fax: 0769-58075898

E-mail: ada@anci.com Web: www.anci.com

样品描述 Sample Description			
样品名称 Sample Name	锂电池组 Lithium Battery Pack	样品型号 Sample Model	BluE-PACK5.1
测试实验室 Testing laboratory	东莞市安磁检测技术有限公司 Dongguan Anci Electronic Technology Co., Ltd.		
测试地址 Testing Address	广东东莞市松山湖高新技术产业开发区总部2路11号A座1-2层 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial, Development Zone, Dongguan City, Guangdong Pr. China		
委托单位 Applicant	深圳科士达新能源有限公司 Shenzhen Kstar New Energy Company Limited		
委托单位地址 Applicant Address	广东省深圳市光明新区高新园西区七号路科士达工业园研发大厦9楼 The 9th Floor, R&D Building, Kstar Industrial Park, Guangming Hi-tech Industrial Zone, 518107 Shenzhen, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA		
制造商 Manufacturer	深圳科士达科技股份有限公司光明分公司 Shenzhen KSTAR Science & Technology Co., Ltd. Guangming Branch		
制造商地址 Manufacturer Address	深圳市宝安区公明街道光明高新园区科士达科技工业园 Kstar High Tech Park, Guangming High, Technology Town, Gongming Street, Baoan District, 516229 Shenzhen City, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA		
电芯生产单位 Factory of Cell	宁德时代新能源科技股份有限公司 Contemporary Ampere Technology Co., Limited		
测试标准 Standard	ST/SG/AC.10/11/Rev.6/Amend.1 Section 38.3		
测试日期 Tested date	2020-07-28 to 2020-08-19		
检验结论 Test conclusion:			
<p>The Lithium Battery Pack submitted by Shenzhen Kstar New Energy Company Limited are tested according to Section 38.3 of the six of the Recommendations on the Transport of Dangerous Goods, Manual of Test and Criteria (ST/SG/AC.10/11/Rev.6/Amend.1 Section 38.3). The test items are full items. The test results comply with the relevant requirements of the standard.</p> <p>由深圳科士达新能源有限公司送检的锂电池组, 依据《关于危险品货物运输的建议书》试验和标准手册第六修订版修正1第38.3节进行检测, 试验为全项目, 测试结果符合标准相关要求。</p>			

检测 Tested by


陈保霖

审核 Reviewed by



批准 Approved by




样品信息 Sample Information			
标称电压 Nominal Voltage	51.2V	额定容量 Rated Capacity	100Ah
瓦时 Watt-hour	5.12kWh	商标 Trade mark	
充电上限电压 Limited Charge Voltage	56.5V	放电终止电压 Discharge Cut-Off Voltage	44.8V
充电电流 Charge Current	50A	最大持续充电电流 Max. Continuous Charge Current	50A
放电电流 Discharge Current	50A	最大持续放电电流 Max. Continuous Discharge Current	80A
充电截止电流 End Charge Current	2A	电池尺寸 Battery dimensions	53cm*24cm*54cm
电芯型号 Cell Model	001CB270	电芯容量 Cell Rated Capacity	100Ah
组合方式 Compound mode	16S1P		
Description of the sampling procedure: / 取样程序的说明: /			
Description of the deviation from the standard, if any: / 测试结果不符合标准项的说明: /			
Remarks/备注: 1. 本报告中以点代替小数点。 Throughout this report a comma is used as the decimal separator. 2. 判定栏中“-”表示“不需要判定”，“P”表示“通过”，“F”表示“不通过”，“N/A”表示“不适用”。 As for the Verdict, “-” means “no need for judgement”, “P” means “pass”, “F” means “fail” and “N/A” means “not applicable”.			

Summary of testing:

Tests performed (name of test and test clause):

Test items	Sample Number
T.1: Altitude simulation / 高度模拟	B1# - B4#
T.2: Thermal test / 温度测试	
T.3: Vibration / 振动	
T.4: Shock / 冲击	
T.5: External short circuit / 外接短路	
T.6: Crush / 挤压 or Impact / 撞击	C1# - C10#
T.7 Overcharge / 过充电	B5# - B8#
T.8: Forced discharge / 强制放电	C11# - C30#

Testing location:

测试地点:

东莞市安磁检测技术有限公司
 Dongguan Anci Electronic Technology Co., Ltd.
 广东东莞市松山湖高新技术产业开发区总部
 2路11号A座1-2层
 1-2 Floor, Building A, No.11, Headquarters
 2 Road, Songshan Lake Hi-tech Industrial,
 Development Zone, Dongguan City,
 Guangdong Pr. China

The samples' state is good.

样品状况良好。

Large Batteries of B1#~B2# B5#~B6 are full charged state after first cycle;

大型电池组B1#~B2# B5#~B6 为第一个充电周期满电状态;

Large Batteries of B3#~B4# B7#~B8 are full charged state after 25th cycles;

大型电池组B3#~B4# B7#~B8为25次循环后满电状态;

Rechargeable component cells of C1#~C5# are 50% charged state after first cycle;

可充电元件电芯C1#~C5#为第一个充电周期后50%充电状态;

Rechargeable component cells of C6#~C10# are 50% charged state after 25th cycles;

可充电元件电芯C6#~C10#为25次循环后50%充电状态;

Rechargeable component cells of C11#~C20# are full discharged after first cycle;

可充电元件电芯C11#~C20#为第一个充电周期完全放电状态;

Rechargeable component cells of C21#~C30# are full discharged after 25th cycles;

可充电元件电芯C21#~C30#为25次循环后完全放电状态;

Test Procedure:

1. Each battery type is subjected to tests T.1 to T.8. Tests T.1 to T.5 are conducted in sequence on the same battery. Tests 6 and 8 are conducted using not otherwise tested batteries. Test T.7 may be conducted using undamaged batteries previously used in Tests T.1 to T.5 for purposes of testing on cycled batteries.

每一种类型的电池均应进行T.1至T.8项试验。电池必须按顺序在相同的一组电池上进行试验T.1至T.5。试验T.6和T.8应使用未另外试验过的电池。试验T.7可以使用先前在试验T.1至T.5中使用过的未损坏电池进行，以便测试经过充放电的电池。

2. In order to quantify the mass loss, the following procedure is provided:

$$\text{Mass loss(\%)} = (M_1 - M_2) / M_1 \times 100$$

为了量化质量损失，可用以下公式计算：质量损失(%)=(M₁-M₂)/M₁×100

Where M₁ is the mass before the test and M₂ is the mass after the test. When mass loss does not exceed the values in Table below, it is considered as "no mass loss".



式中：M₁是试验前的质量，M₂是试验后的质量。如果质量损失不超过下表所列的数值，应视为“无质量损失”。

Mass M of cell or battery 电芯或电池的质量	Mass loss limit 质量损失限值
M<1g	0.5%
1g≤M≤75g	0.2%
M>75g	0.1%

3. In test T.1 to T.4, batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test battery after testing is not less than 90% of its voltage immediately prior to this procedure.

在测试T.1至T.4中，电池须满足无渗漏、无泄气、无解体、无破裂和无起火，并且每个试验电池在试验后的开路电压不小于其在进行这一试验前电压的90%。

Photos of Samples and Labels/样品照片及标识

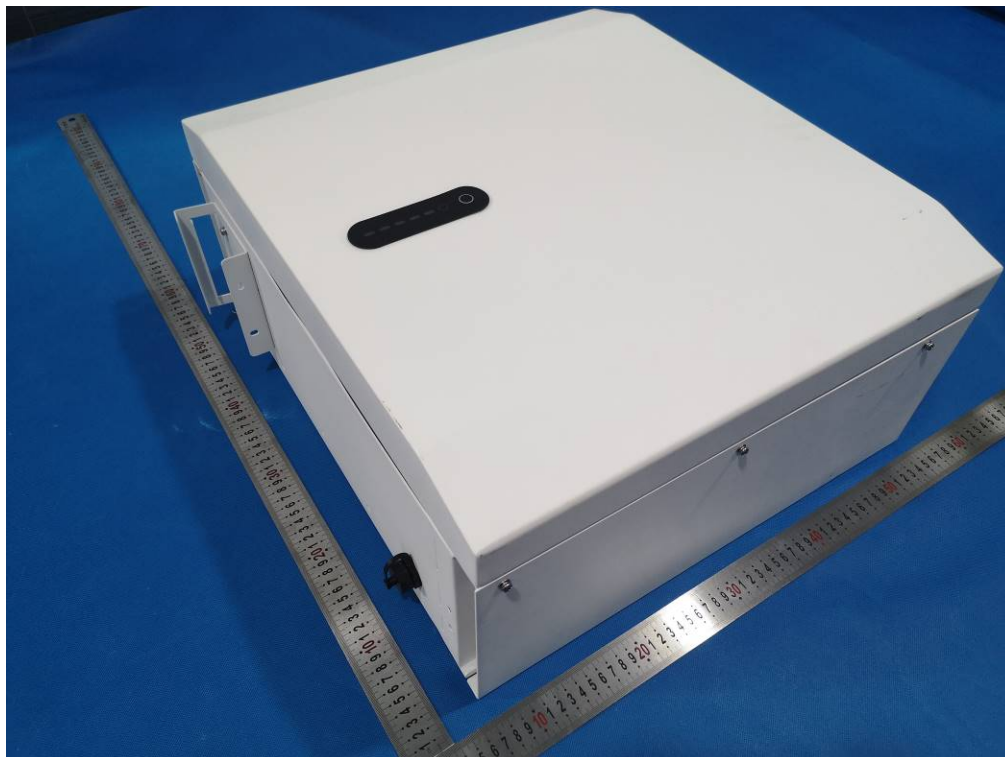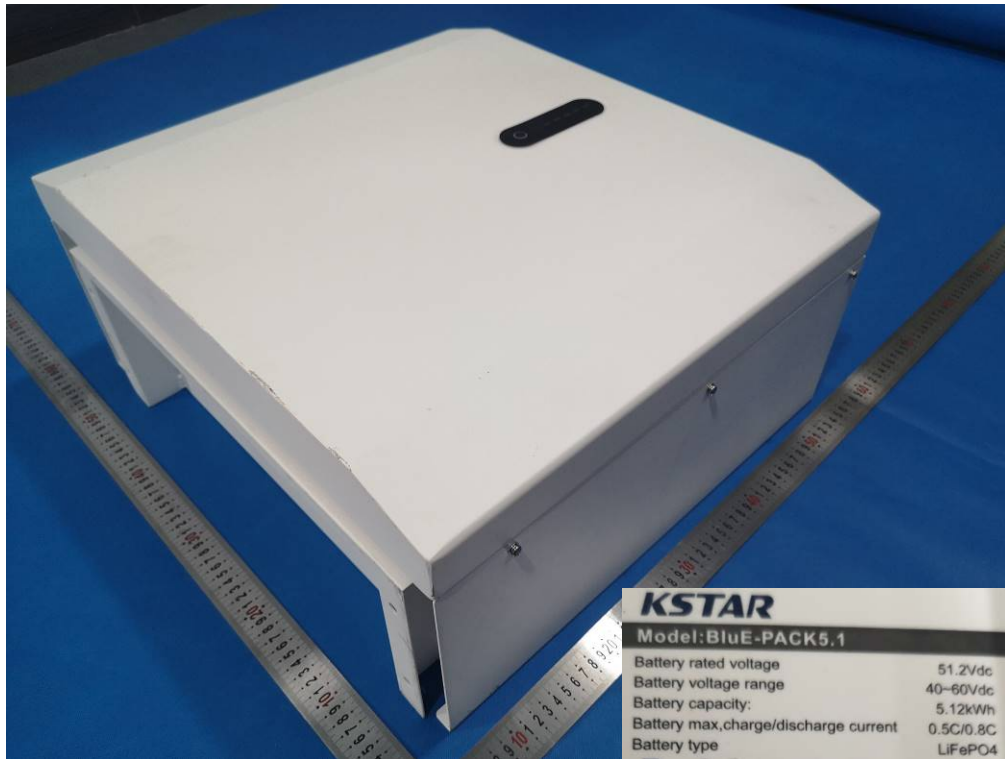



Dongguan Anci Electronic Technology Co., Ltd.

Address: 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial, Development Zone, Dongguan City, Guangdong Pr. China

Tel: 0769-85075888 Fax: 0769-58075898

E-mail: ada@anci.com Web: www.anci.com

Photos of Samples and Labels/样品照片及标识

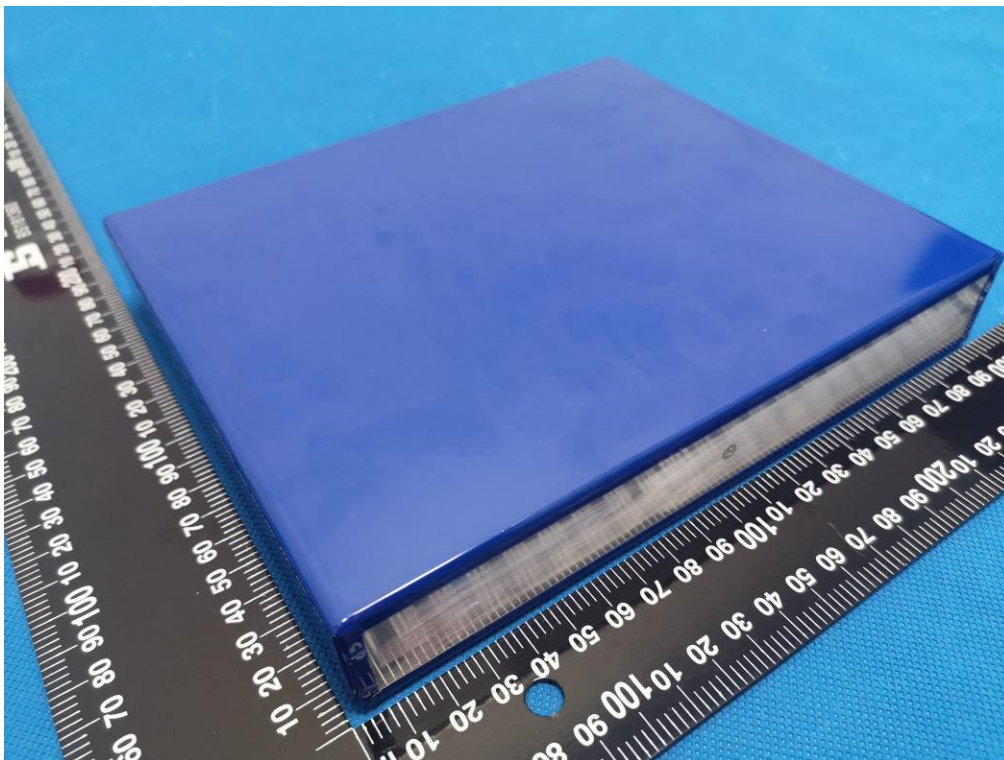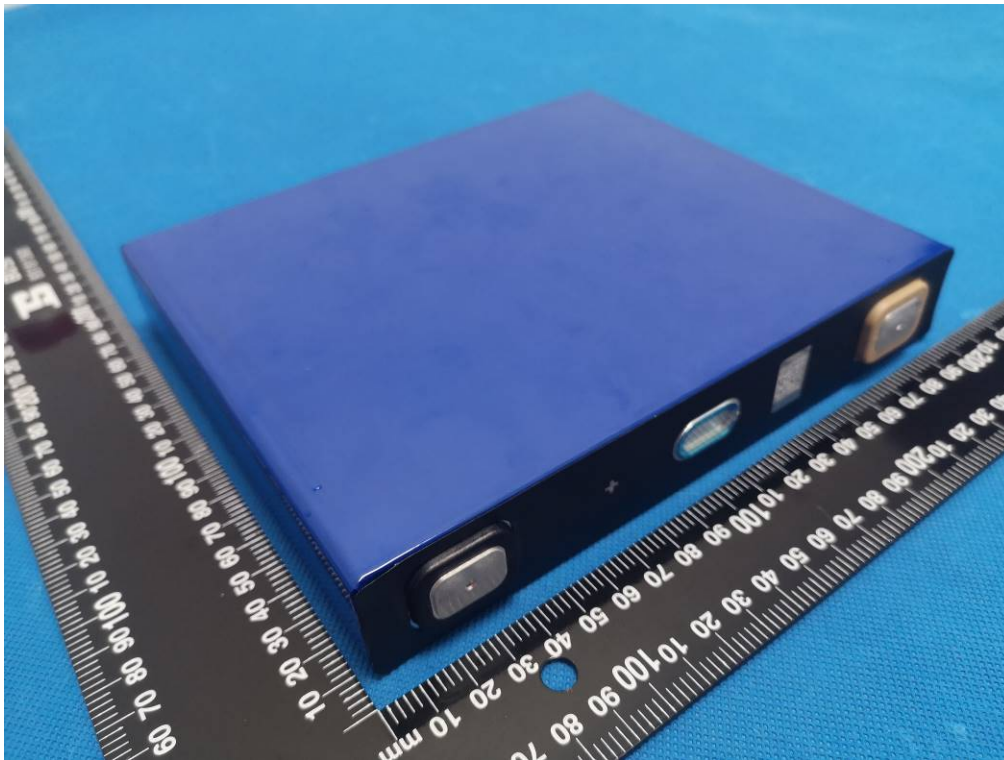

38.3.4	Procedure / 测试步骤		判定 Verdict
38.3.4.1	Test 1: Altitude simulation / 测试1: 高度模拟		P
	Test cells and batteries shall be stored at a pressure of 11.6kPa or less for at least six hour at ambient temperature (20±5°C). 将电芯和电池在温度为20±5°C，大气压力为不大于11.6kpa 的环境中贮存不少于6 个小时。		P
	Requirement / 标准要求: 1. Cells and batteries Mass loss limit: ≤0.1%. 样品质量损失≤0.1%。 2. Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的90%,此要求不适用于完全放完电的电池和电芯。 3. No leakage, no venting, no disassembly, no rupture and no fire. 样品（电池）应无漏液、无排气、无解体、无破裂以及无着火现象的发生。	No leakage, no venting, no disassembly, no rupture and no fire. 无漏液、无排气、无解体、无破裂以及无着火现象。 The data see table 1. /测试数据见表1。	P

38.3.4.2	Test 2: Thermal test / 测试 2: 温度实验		P
	<p>Test cells and batteries are to be stored for 电池存储条件如下:</p> <ol style="list-style-type: none"> one temperature cycle: 72±2°C(6h) — -40±2°C(6h). 一次温度循环为72±2°C(6h) — -40±2°C(6h)。 The maximum time interval between test temperature extremes is 30 minutes. 温度转换最大间隔时间为30mins。 This procedure is to be repeated 10 times. 重复10 次循环。 after which all test cells and batteries are to be stored for 24 hours at ambient temperature (20±5°C). 循环结束后, 电池在 20±5°C的条件下 搁置24 小时。 For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours. 对于大型电芯和电池, 暴露于极端试验温度的时间至少应为12小时 		P
	<p>Requirements / 标准要求:</p> <ol style="list-style-type: none"> Cells and batteries Mass loss limit: ≤0.1%. 样品质量损失≤0.1%。 Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的90%,此要求不适用于完全放完电的电池和电芯。 No leakage, no venting, no disassembly, no rupture and no fire. 样品 (电池) 应无漏液、无排气、无解体、无破裂以及无着火现象的发生。 	<p>No leakage, no venting, no disassembly, no rupture and no fire. 无漏液、无排气、无解体、无破裂以及无着火现象。 The data see table 1. /测试数据见表1。</p>	P

38.3.4.3	Test 3: Vibration / 测试 3: 振动		P
	<p>1. Cells and batteries are firmly secured to the platform of the vibration machine. 电芯和电池牢固地安装在振动台（的台面）上。</p> <p>2. The vibration :a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. 振动以正弦波形式，以7Hz 增加至200Hz，然后在减少回到7Hz 为一个循环，一个循环持续15 分钟的对数前移传送。</p> <p>3. For cells and small batteries. The logarithmic frequency sweep is as follows: from 7 Hz a peak acceleration of 1 gn is maintained until 18 Hz is reached, The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8 gn occurs (approximately 50Hz), A peak acceleration of 8 gn is then maintained until the frequency is increased to 200 Hz. 对于电芯和小型电池，对数扫频为:从7 赫兹开始保持1gn 的最大加速度直到频率为18 赫兹，然后将振幅保持在0.8 毫米（总偏移1.6 毫米）并增加频率直到最大加速度达到8gn（频率约为50 赫兹），将最大加速度保持在8gn 直到频率增加到200 赫兹。</p> <p>4. For large batteries: from 7 Hz to a peak acceleration of 1 gn is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 2 gn occurs (approximately 25 Hz). A peak acceleration of 2 gn is then maintained until the frequency is increased to 200 Hz. 对于大型电池：从7 赫兹开始，保持1 gn 的最大加速度，直到频率达到18 赫兹。然后将振幅保持在0.8 毫米(总偏移1.6 毫米)，并增加频率直到最大加速度达到2 gn (频率约为25 赫兹)。将最大加速度保持在2 gn 直到频率增加到200 赫兹。</p> <p>5. This cycle repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting position of the cell. One of the directions of vibration must be perpendicular to the terminal face. 这一振动过程须对三个互相垂直的电池安装方位的每一方向重复进行12次，总共为时3小时。其中一个振动方向必须与端面垂直。</p>		P

	<p>Requirements / 标准要求:</p> <p>1. Cells and batteries Mass loss limit: ≤0.1%. 样品质量损失≤0.1%.</p> <p>2. Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的90%,此要求不适用于完全放完电的电池和电芯。</p> <p>3. No leakage, no venting, no disassembly, no rupture and no fire. 样品（电池）应无漏液、无排气、无解体、无破裂以及无着火现象的发生。</p>	<p>No leakage, no venting, no disassembly, no rupture and no fire. 无漏液、无排气、无解体、无破裂以及无着火现象。 The data see table 1. /测试数据见表1。</p>	<p>P</p>									
<p>38.3.4.4</p>	<p>Test 4: Shock / 测试 4: 冲击</p>		<p>P</p>									
	<p>Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery. Each cell or battery shall be subjected to a half-sine shock of peak acceleration of 150 gn and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50 gn and pulse duration of 11 milliseconds. 被测电芯和电池应通过坚固的方式紧固在试验设备上，可以支撑每个被测电池的所有面。每个电芯或电池应用峰值加速度150 gn、脉冲时间6 ms的半正弦波进行冲击。或者大电芯应用峰值加速度50 gn、脉冲时间11 ms的半正弦波进行冲击。</p>		<p>P</p>									
	<p>Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations. 每个电池应用半正弦波冲击的峰值加速度大小取决于电池的质量。小电池应用6 ms的脉冲时间以及大电池应用11 ms的脉冲时间。根据下面的公式来计算合适的最小峰值加速度。</p> <table border="1" data-bbox="327 1500 925 1948"> <thead> <tr> <th>Battery</th> <th>Minimum peak acceleration</th> <th>Pulse duration</th> </tr> </thead> <tbody> <tr> <td>Small batteries</td> <td>150 gn or result of formula Acceleration (gn) $= \sqrt{\left(\frac{100850}{mass *}\right)}$ Whichever is smaller</td> <td>6ms</td> </tr> <tr> <td>Large batteries</td> <td>50 gn or result of formula Acceleration (gn) $= \sqrt{\left(\frac{30000}{mass *}\right)}$ Whichever is smaller</td> <td>11ms</td> </tr> </tbody> </table>	Battery	Minimum peak acceleration	Pulse duration	Small batteries	150 gn or result of formula Acceleration (gn) $= \sqrt{\left(\frac{100850}{mass *}\right)}$ Whichever is smaller	6ms	Large batteries	50 gn or result of formula Acceleration (gn) $= \sqrt{\left(\frac{30000}{mass *}\right)}$ Whichever is smaller	11ms		<p>N/A</p>
Battery	Minimum peak acceleration	Pulse duration										
Small batteries	150 gn or result of formula Acceleration (gn) $= \sqrt{\left(\frac{100850}{mass *}\right)}$ Whichever is smaller	6ms										
Large batteries	50 gn or result of formula Acceleration (gn) $= \sqrt{\left(\frac{30000}{mass *}\right)}$ Whichever is smaller	11ms										

	<p>Each cell or battery is subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks. 每个电芯或电池应在三个垂直面的正向各承受三次冲击，负向再各承受3次冲击，共18次。</p>		P
	<p>Requirements / 标准要求: 1. Cells and batteries Mass loss limit: ≤0.1%. 样品质量损失≤0.1%。 2. Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的90%,此要求不适用于完全放完电的电池和电芯。 3. No leakage, no venting, no disassembly, no rupture and no fire. 样品（电池）应无漏液、无排气、无解体、无破裂以及无着火现象的发生。</p>	<p>No leakage, no venting, no disassembly, no rupture and no fire. 无漏液、无排气、无解体、无破裂以及无着火现象。 The data see table 1. /测试数据见表1。</p>	P
38.3.4.5	<p>Test 5: External Short Circuit / 测试5 外接短路</p>		P
	<p>1. The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches 57±4°C. 保持试验环境温度稳定在57±4°C，以使电芯或电池样品外表温度达到57±4°C。 2. The cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0.1 ohm at 57±4°C, This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to 57±4°C. 将样品正负极用小于0.1Ω的总电阻回路进行短路，样品的外表温度恢复到57±4°C之后保持短路状态1小时以上。 3. The small cell and small battery must be observed for a further six hour for the test to be concluded and 12 hours for large cells and large batteries 对小型电芯和小型电池必须进一步观察6个小时才能下结论。对大型电芯和小型电池的暴露时间应至少12小时</p>		P
	<p>Requirements / 标准要求: During the test and within six hours after test, the cells or batteries. 在测试过程中以及之后6个小时内，电芯或电池样品。 1. External temperature not exceed 170°C. 外表温度不超过170°C。 2. No disassembly, no rupture and no fire. 无解体、无破裂和无着火现象发生。</p>	<p>External temperature not exceed 170°C 外表温度不超过170°C No disassembly, no rupture and no fire. 无解体、无破裂和无着火现象发生。 The data see table 1. /测试数据见表1。</p>	P

38.3.4.6	Test 6: Impact / Crush / 测试6: 撞击 / 挤压		P
	Impact (applicable to cylindrical cells not less than 18mm in diameter). 撞击（适用于直径不小于18毫米的圆柱形电池）。		N/A
	1. The test sample cell or component cell is to be placed on a flat smooth surface. 试样电池或元件电池放在平坦光滑的表面上。 2. A 15.8 mm ± 0.1 mm diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A 9.1 kg ± 0.1kg mass is to be dropped from a height of 61 ± 2.5 cm at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface. 一根316型不锈钢棒横放在试样中心，钢棒直径15.8毫米±0.1毫米，长度至少6厘米，或电池最长端的尺寸，取二者之长者。将一块9.1千克±0.1千克的重锤从61 ± 2.5厘米高处跌落到钢棒和试样交叉处，使用一个几乎没有摩擦的、对落体重锤阻力最小的垂直轨道或管道加以控制。垂直轨道或管道用于引导落锤沿与水平支撑表面呈90度落下。 3. The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8 mm ± 0.1 mm diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact. 接受撞击的试样，纵轴应与平坦表面平行并与横放在试样中心的直径15.8 ± 0.1毫米弯曲表面的纵轴垂直。每一试样只经受一次撞击。		N/A
	Requirements / 标准要求: 1. Cells and component cells meet this requirement if their external temperature does not exceed 170 °C. 电芯和元件电芯的最高表面温度应不超过170°C。 2. No disassembly and no fire during the test and within six hours after this test. 试验结束后6个小时之内，试样无解体和无着火现象发生。		N/A
	Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18mm in diameter). 挤压（适用于棱柱形、袋装、硬币/纽扣电池和直径小于18毫米的圆柱形电池）。		P

	<p>1. A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached.</p> <p>将电池或元件电池放在两个平面之间挤压，挤压力度逐渐加大，在第一个接触点上的速度大约为1.5 厘米/秒。挤压持续进行，直到出现以下三种情况之一：</p> <p>(a) The applied force reaches 13 kN ± 0.78 kN. 施加的力达到13 千牛±0.78 千牛。</p> <p>(b) The voltage of the cell drops by at least 100 mV. 电池的电压下降至少100 毫伏。</p> <p>(c) The cell is deformed by 50% or more of its original thickness. 电池变形达原始厚度的50%以上。</p> <p>2. A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.</p> <p>棱柱形或袋装电池应从最宽的一面施压。纽扣/硬币形电池应从其平坦表面施压。圆柱形电池应从与纵轴垂直的方向施压。</p>	<p>The applied force reaches 13 kN ± 0.78 kN. 施加的力达到13 千牛 ±0.78 千牛。</p>	<p>P</p>
	<p>Requirements / 标准要求:</p> <p>1. Cells and component cells external temperature not exceed 170°C. 电芯或元件电芯的最高表面温度应不超过170°C。</p> <p>2. No disassembly and no fire within six hours of this test 试验结束后6 个小时之内，样品无解体和无着火现象发生。</p>	<p>External temperature not exceed 170°C 外表温度不超过170°C</p> <p>No disassembly, no rupture and no fire. 无解体、无破裂和无着火现象发生。</p> <p>The data see table 2. /测试数据见表2。</p>	<p>P</p>

38.3.4.7	Test 7: Overcharge / 测试 7: 过充电		P
	<p>1. The charge current shall be twice the manufacturer's recommended maximum continuous charge current. 以2 倍制造厂推荐的最大持续充电电流对样品充电。</p> <p>2. The minimum voltage of the test shall be as follows: 本测试最小电压为:</p> <p>a) When the manufacturer's recommended charge voltage is not more than 18 V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22 V.. 如果制造商建议的充电电压不超过18V, 本测试的最小充电电压应是制造商标定最大充电电压的两倍或者是22V 之中的较小者。</p> <p>b) When the manufacturer's recommended charge voltage is more than 18 V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage. 如果制造商推荐的充电电压超过18V, 本测试的最小充电电压应是厂家标定最大充电电压的1.2 倍。</p> <p>3. Tests are to be conducted at ambient temperature. The duration of the test shall be 24 hours. 20±5°C的环境下, 试验持续24 小时。</p>	The voltage of the test is 67.8V, and the current is 100A. / 测试电压为67.8V, 电流为100A.	P
	<p>Requirements / 标准要求: No disassembly and no fire within seven days of this test. 试验样品在试验中和试验后7 天内, 应无解体和无着火现象发生。</p>		P
38.3.4.8	Test 8: Forced discharge / 测试 8: 强制放电		P
	<p>Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer. 20±5°C的环境下, 将单个电芯连接在12V 的直流电源上进行强制放电, 此直流电源提供给每个电芯初始电流为制造厂指定的最大放电电流。</p>		P
	<p>The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere). 将适当大小和额定值的电阻负荷与试验电池串联, 计算得出给定的放电电流。对每个电池进行强制放电, 放电时间(小时)应等于其额定容量除以初始试验电流(安培)。</p>		P

	<p>Requirements / 标准要求: No disassembly and no fire within seven days of this test. 试验样品在试验中和试验后7 天内，应无解体和无着火现象发生。</p>	<p>No disassembly and no fire. 无解体和无着火现象。 The data see table 2. /测试数据见表2。</p>	<p>P</p>
--	---	--	----------

Main Test Apparatus 主要测试仪器

Serial No. 设备编号	Name of Equipment 设备名称	Model 型号	Calibration Date 校准日期	Next Calibration Date 下次校准日期
AN-020	数字万用表	FLUKE, 15B	2020/03/10	2021/03/09
AN-076	电子秤	TCS-11	2020/03/03	2021/03/02
AN-158	电脑式电池挤压试验机	GAOXIN, GX-5067-CSM	2020/03/10	2021/03/09
AN-159	电磁式振动试验仪	LABTONE, EV203	2020/03/10	2021/03/09
AN-261	机械式冲击试验机	苏州苏试	2020/05/18	2021/05/17
AN-162	电池低压高空模拟试验箱	GAOXIN, GX-3020-Z	2020/03/10	2021/03/09
AN-163	可编程恒温恒湿试验箱（快速温度变化试验箱）	GAOXIN, GX-3000-150LT	2020/03/10	2021/03/09
AN-164	电池重物冲击试验机	GAOXIN, GX-5066	2020/03/10	2021/03/09
AN-166	数显温湿度计	THPIM, X6R-TH-B	2020/03/10	2021/03/09
AN-169	电子天平秤	YINGHENG, YHC	2020/03/10	2021/03/09
AN-170	时钟	Yongchun	2020/03/10	2021/03/09
AN-171	数字大气压力表	YIOU, BY-2003P	2020/03/10	2021/03/09
AN-266	高性能电池检测系统	NEWARE, CT-3008-5V-100A-NTA	2020/06/15	2021/06/14
AN-267	高性能电池检测系统	NEWARE, CT-3008-5V-100A-NTA	2020/06/15	2021/06/14
AN-185	多路温度测试仪	Rongxin, TWC-2A	2020/03/10	2021/03/09
AN-186	多路温度测试仪	Rongxin, TWC-2A	2020/03/10	2021/03/09
AN-210	直流稳压电源	Rui Yuan, WYK-6030K	2020/03/10	2021/03/09
AN-211	直流稳压电源	Rui Yuan, WYK-6030K	2020/03/10	2021/03/09
AN-212	直流稳压电源	Rui Yuan, WYK-6030K	2020/03/10	2021/03/09
AN-213	直流稳压电源	Rui Yuan, WYK-6030K	2020/03/10	2021/03/09
AN-214	直流稳压电源	Rui Yuan, WYK-6030K	2020/03/10	2021/03/09
AN-217	电池短路试验机	GAOXIN, GX-6055-B5	2020/03/10	2021/03/09
AN-218	直流稳压电源	Rui Yuan, WYK-6060K	2020/03/10	2021/03/09
AN-263	动力电池检测系统	Xinwei, CE-7002-200V100A	2020/03/10	2021/03/09

Table 1: T1-T5 / 表1. 试验1-试验5											
Sample No. / 样品编号	Mass prior to test / 试验前质量(g)	OCV prior to test / 试验前电压(V)	Test 1: Altitude simulation 测试 1: 高度模拟		Test 2: Thermal test 测试 2: 温度实验		Test 3: Vibration 测试 3: 振动		Test 4: Shock 测试 4: 冲击		Test 5: External Short Circuit 测试 5: 外接短路
			Mass loss(%) 质量损失(%)	Change ratio 电压比(%)	Mass loss(%) 质量损失(%)	Change ratio 电压比(%)	Mass loss(%) 质量损失(%)	Change ratio 电压比(%)	Mass loss(%) 质量损失(%)	Change ratio 电压比(%)	Temp. (°C) 温度(°C)
B1#	57593.3	55.46	0.000	98.467	0.000	98.645	0.000	99.165	0.000	99.925	56.9
B2#	57512.6	55.51	0.000	98.307	0.000	98.387	0.000	99.367	0.000	99.944	57.0
B3#	57546.8	55.38	0.000	98.862	0.000	97.790	0.000	99.440	0.000	99.887	56.7
B4#	57568.5	55.34	0.000	98.753	0.000	98.134	0.000	99.403	0.000	99.906	57.2

Table 2: T6-T8 / 表2. 试验6-试验8						
Test 6: Impact/ Crush / 测试6: 撞击/挤压			Test 7: Overcharge / 测试7:过充电		Test 8: Forced discharge / 测试8: 强制放电	
Sample No. / 样品编号	OCV prior to test / 试验前电压 (V)	Temp. (°C) / 温度 (°C)	Sample No. / 样品编号	OCV prior to test / 试验前电压 (V)	Sample No. / 样品编号	OCV prior to test / 试验前电压 (V)
C1#	3.403	23.5	B5#	55.32	C11#	3.247
C2#	3.396	23.8	B6#	55.27	C12#	3.264
C3#	3.384	23.4	B7#	55.22	C13#	3.289
C4#	3.388	23.5	B8#	55.16	C14#	3.213
C5#	3.391	24.0	--	--	C15#	3.266
C6#	3.376	24.3	--	--	C16#	3.254
C7#	3.415	23.9	--	--	C17#	3.331
C8#	3.395	24.1	--	--	C18#	3.259
C9#	3.372	24.4	--	--	C19#	3.268
C10#	3.381	24.6	--	--	C20#	3.274
--	--	--	--	--	C21#	3.225
--	--	--	--	--	C22#	3.293
--	--	--	--	--	C23#	3.304
--	--	--	--	--	C24#	3.258
--	--	--	--	--	C25#	3.247
--	--	--	--	--	C26#	3.302
--	--	--	--	--	C27#	3.285
--	--	--	--	--	C28#	3.267
--	--	--	--	--	C29#	3.253
--	--	--	--	--	C30#	3.270

--- 报告结束 ---
--- End of report ---

声明 Declaration

1. 本报告无批准人、审核人及鉴定人签名无效。

The test report is invalid without the signatures of Ratifier, Reviewer and Testing engineer.

2. 对检验报告若有异议，应于收到报告之日起十五天内向检验单位提出。

Objections to the test report must be submitted to ANCI within 15 days.

3. 未经本试验室书面同意，不得部分地复制本报告。

Nobody is allowed to photocopy or partly photocopy this test report without written permission of ANCI.

4. 客户必须如实提供样品及资料，并保证申报品名和样品以及运输货物相同，否则本检测单位不承担任何相关责任。

The client should provide samples and relevant data, at the same time, they should guarantee the consistence of the product's name the declared, the samples they provided and the goods to be transported. Otherwise we will not bear any relevant responsibilities.

5. 本报告仅对送检样品负责。

The test report is valid for the tested samples only.

6. 任何情况下检测单位的赔偿责任都不会超过检测单位就本次检测所收取的检测费用。

ANCI's liability under no circumstance will exceed the testing fee received from applicant for test conducted hereof this testing report.

7. 本报告涂改无效。

The test report is invalid if altered.

--- 报告结束 ---

--- End of report ---