


GMSW 14 PLUS VX

MONOVALENT HEATING SYSTEM WITH BRINE AS HEAT SOURCE

ORDER NUMBER: 264831
SERIES: GOLF MIDI PLUS
TF MAX. 65 °C

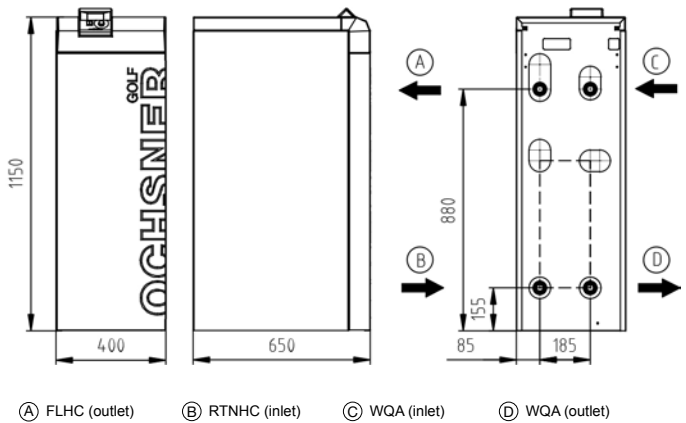

(A) FLHC (outlet) (B) RTNHC (inlet) (C) WQA (inlet) (D) WQA (outlet)

APPLIANCE DATA

Dimensions HxWxD	[mm]	1150x400x650
Hydraulic connection	[inch]	1 1/4"
Weight	[kg]	171
Casing colour		Tiger white 29/11289/grey RAL 7016

SPECIFICATION

Phases/nominal voltage/frequency	[~]/[V]/[Hz]	1/230/50
Output factor cos φ		0,88
Fuse protection (tripping curve "C")	[A]	32
Max. operating current	[A]	27,90
Max. starting current/max. with soft start	[A]	130.00 / 65.00
Sound power level/sound pressure level (at 1 m distance)	[dBA]	50.00 / 42.00

HEATING MODE PERFORMANCE FIGURES (to EN 14511)

Standard point B0/W35

Heating output	[kW]	13,20
Total power consumption / operating current	[kW]/[A]	2.70 / 13.60
COP		4,80

Operating point B0/W50

Heating output	[kW]	12,10
Total power consumption / operating current	[kW]/[A]	3.90 / 19.30
COP		3,10

Operating point B0/W60

Heating output	[kW]	11,80
Total power consumption / operating current	[kW]/[A]	4.40 / 21.70
COP		2,70

CONDENSER

Type		Plate heat exchanger
Material		Stainless steel 1.4301
Max. refrigerant operating pressure	[bar]	45
Max. heat transfer medium operating pressure	[bar]	6
Heat transfer medium temperature differential	[K]	5
Application range	[°C]	65
Heat transfer medium		Water
Test pressure	[bar]	54
Heat transfer medium flow rate	[m³/h]	2,30
Internal pressure differential	[mbar]	110
Flow meter FM standard	external	FM-DN 20 kvs 10
Circulation pump heat sink (WNA)	Internal	Yonos Para RS 25/7.5
Residual head I WNA external, incl. FM	[mbar]	323

REFRIGERANT CIRCUIT


Refrigerant		R410A
Refrigerant charge	[kg]	2,3

COMPRESSOR

Type		Scroll
Output levels		1
Speed	[rpm]	2900
Voltage/frequency	[V]/[Hz]	230/50

EVAPORATOR

Type		Plate heat exchanger
Material		Stainless steel 1.4401
Number	[pce]	1
Max. heat transfer medium operating pressure	[bar]	6
Max. refrigerant operating pressure	[bar]	12
Heat transfer medium temperature differential	[K]	3
Application range	[°C]	-5/+20
Heat transfer medium		Brine max. 30%
Test pressure	[bar]	54
Heat transfer medium flow rate	[m³/h]	3,28
Internal pressure differential	[mbar]	170
Flow meter (FM) standard	external	FM-DN 20 kvs 10
Circulation pump heat source (WQA)	Internal	Stratos Para 25/1-12
Residual head I WQA external, incl. FM	[mbar]	954

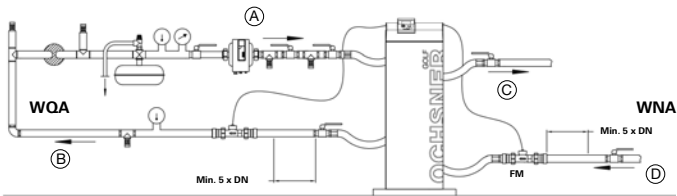

- (A) Heat source inlet
- (B) Heat source outlet
- (C) Heat pump flow
- (D) Heat pump return

RECOMMENDED ACCESSORIES

Heat pump separating cylinders	min. PU500	30 l/kW at B0/W35
DHW tank	min. SP300/SP350	30 l/kW at B0/W50
3-way switching module	DN40 (1 1/4")	kvs 25, pressure loss 24 mbar
External PHE for DHW heating	PHE 5007	Prim.: 1 1/4" / 19 mbar Sec.: 1" / 24 mbar
Brine collector set for shallow laying	ESK 7	Pressure loss 86 mbar incl. brine distributor

EXTRACTION CAPACITY ACC. TO VDI 4640

FOR SHALLOW LAYING

Soil conditions	Max. spec. extraction capacity at 1800 h/a	Max. spec. extraction capacity at 2400 h/a
Dry, non-cohesive soil	10 W/m ²	8 W/m ²
Cohesive soil, moist	25 W/m ²	20 W/m ²
Water-saturated soil with sand/gravel	40 W/m ²	32 W/m ²

FOR DEEP TRENCH LAYING

Soil conditions	Max. spec. extraction capacity at 1800 h/a
Cohesive soil, moist	100 W/m deep trench
Water-saturated soil	125 W/m deep trench


FOR GEOTHERMAL PROBES

Soil conditions	Spec. extraction capacity at 1800 h/a	Max. spec. extraction capacity at 2400 h/a
Dry sediment	25 W/m	20 W/m
Shale, slate	45 W/m	35 W/m
Firm rock with high thermal conductivity	84 W/m	70 W/m
Substratum with high groundwater flow	65-80 W/m	55-65 W/m

SIZING RECOMMENDATION WITH BRINE AS HEAT SOURCE

Pressure loss in connection line, incl. individual losses	Max. 100 mbar
Pressure loss in brine circuits or probes, incl. brine distributor	Max. 300 mbar

PERFORMANCE CURVES GMSW 14 PLUS VX

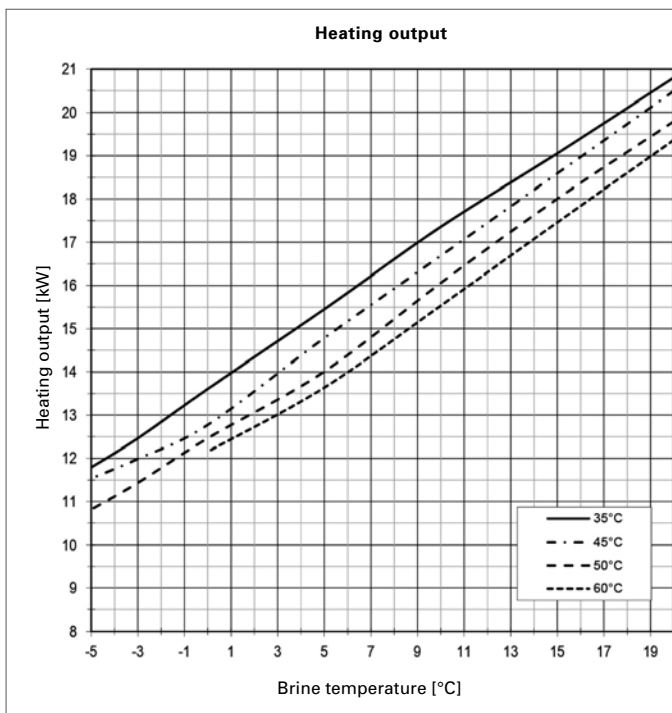

PRODUCT DATA ErP: GMSW 14 PLUS VX

	COLDER	MEAN	HOTTER
LOW TEMPERATURE	A++	35°C	
ηs	217	208	208
Energy consumption	[kWh] 5793	5053	3262
P rated	[kW] 13	13	13
SCOP	5,62	5,40	5,41
MEDIUM TEMPERATURE	A++	55°C	
ηs	136	131	131
Energy consumption	[kWh] 7931	6862	4445
P rated	[kW] 12	12	12
SCOP	3,59	3,48	3,47
DHW	A	SP300	
ηWH	86	86	86
Energy consumption	[kWh] 1657	1657	1657
Draw-off profile		XL	
Tank losses	[W]	94	

	indoor	outdoor
Sound power level	[dBA] 50,0	-
Controller class with room remote control	VII	Controller contribution [%] 3,5
Controller class without room remote control	III	Controller contribution [%] 1,5

